

Sightglass for Flanges

Liquip's acrylic sightglass are for mounting between two flanges and allow visual indication of contents in pipework.

Key Features

- Cast Acrylic design that provides superior optical clarity.
- Annealed for improved performance with aggressive fuel additives.
- Sightglass fits between two flanges of the same specification.
- TTMA or ANSI flange options available.
- Full face Viton gaskets available and recommended.
- Sightglasses are date stamped to assist with planned maintenance.
- Suitable for all common fuel grades including diesel, unleaded, jet and ethanol blends.



Ordering Information

API-SG-150	Sightglass	ASA150 40mm	125ID
VI 1-20-T20	JIETTETUSS	ADATOU TOURING	エムンコレ

BF4-SG-40 Sightglass 100MM TTMA 40mm thick Acrylic Flange

BF4-SG-25 Sightglass 100MM TTMA 25mm thick Acrylic Flange comes with 8 x Holes

BF3-SG Sightglass Flange 3" TTMA to suit LBV3-V Butterfly Valve

Specifications

Weight	1.2kg - API-SG-150 0.69kg - BF4-SG-40 0.44kg - BF4-SG-25 0.3kg - BF3-SG
--------	--

Do not use with solvents – see compatibility list following

Maximum working pressure – 1,000kPa Working temperature -50°C to +80°C


Technical Data Mounting bolts of adequate length tightened to a torque of 20Nm -

Tighten up evenly in a criss-cross manner. Install with full face gaskets on both sides.

Do not flame polish.

	•
Associated Equipment	4" ANSI 125 flanges (must have flat face) 4" TTMA flanges BF4 and BF4-1 3" TTMA flanges BF3 and BF3-1 0657V Viton A gasket for 4" TTMA 0656V Viton A gasket for 3" TTMA
Associated Equipment	4" TTMA flanges BF4 and BF4-1 3" TTMA flanges BF3 and BF3-1 0657V Viton A gasket for 4" TTMA 0656V Viton A gasket for 3" TTMA

SIGHTGLASS FOR FLANGES

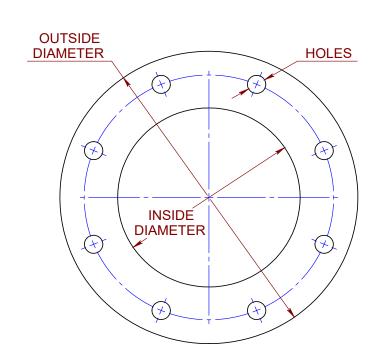



Size	Part No	Outside Diameter	Inside Diameter	Thickness	Holes
4" ANSI125	API-SG-150	228	130	37 - 41	8 x Ø19 on 190 PCD
4" TTMA	BF4-SG-25	178	109	21 - 25	8 x Ø11 on 149.2 PCD
4" TTMA	BF4-SG-40	178	109	37 - 41	8 x Ø11 on 149.2 PCD
3" TTMA	BF3-SG	146	86	21 - 25	8 x Ø11 on 124 PCD

NOTES:

- MATERIAL IS CAST ACRYLIC.
 MOUNTING FLANGES TO BE FLAT TO WITHIN 1mm.
 VITON (OR SIMILAR HARDNESS) GASKETS TO BE USED.
 TIGHTEN MOUNTING BOLTS TO A TORQUE OF 20Nm.
 ALL MEASUREMENTS IN mm.

METERS - VALVES - VENTS - MANHOLES - HOSEREELS - OVERFILL PROTECTION - LOADING ARMS - ELECTRONIC DIPSTICKS



LIQUIP INTERNATIONAL PTY LTD

148B NEWTON RD, WETHERILL PARK, SYDNEY N.S.W. AUSTRALIA 2164 Phone: +61 2 9725-9000 Web: www.liquip.com

X200705

Sheet 1 of 1 Issue: F

Non Compatible - Not Recommended

Acetic Acid 50% Acetic Acid, Glacial Acetic Anhydride

Acetone Acetonitrile Acrylonitrile Allyl Alcohol n-Amyl Acetate

Aniline
Aqua regia
Benzaldehyde
Benzene
Benzyl Acetate
Benzyl Alcohol
Bromine
Bromobenzene
Bromoform
n-Butyl Acetate

Calcium Hypochlorite, saturated

Cellosolve Acetate

n-Butyl Alcohol

i-Butyl Alcohol

t-Butyl Alcohol

Carbazole
Carbon Disulfide
Carbon Tetrachloride
Cedarwood Oil
Chloroacetic Acid
p-Chloracetophenone

Chlorobenzene
Chloroform
Chromic Acid 50%
Cinnamon Oil
Cresol
Cyclohexane
Cyclohexanone

Decalin n-decane

o-Dichlorobenzene p-Dichlorobenzene Diethyl Ether Diethyl Ketone Malonate

Dimethyl Formamide

Sulfoxide
1, 4-dioxane
Diacetone alcohol
1, 2-dichloroethane
2, 4-dichlorophenol

Dioxane

Dibutyl phthalate Dioctyl phthalate

Ether

Ethyl Acetate
Ethyl Benzene
Ethyl Benzoate
Ethyl Butyrate
Ethyl Chloride liquid

Ethyl Cyanoacetate Ethyl Lactate Ethylene Chloride

Fluorides Fluorine

Formic Acid, 98%-100% Acetic Acid, Glacial Hydrochloric Acid, 48% Hydrogen Peroxide, 90%

Hvdrazine **Iodine Crystals** Isobutyl Alcohol Isopropyl Benzene Isopropyl Ether Lacquer Thinner Methyl Alcohol Methyl Ethyl Ketone Methyl Isobutyl Ketone Methyl Propyl Ketone Methylene Chloride 2-Methoxyethanol Methyl Acetate Mineral Spirits Nitric Acid 70% Nitrobenzene Nitromethane Perchloric Acid Perchloroethylene Phenol, Crystals

Phenol, Liquid Phosphoric Acid, 85% Piric Acid Propionic Acid Propylene Oxide

Resorcinol, saturated Salicylic Acid, Powder Salicylic Acid, saturated Sulfur Dioxide, Wet or Dry

Sulfuric Acid, 98% Tetrahydrofuran Thionyl Chloride

Toluene

Tributyl Citrate
Trichloroethane
Trichloroethylene
Trichloroacetic Acid
1,2,4 Trichlorobenzene

Turpentine Undecyl Alcohol Vinylidene Chloride

Xylene

